
SIDE ELEVATION



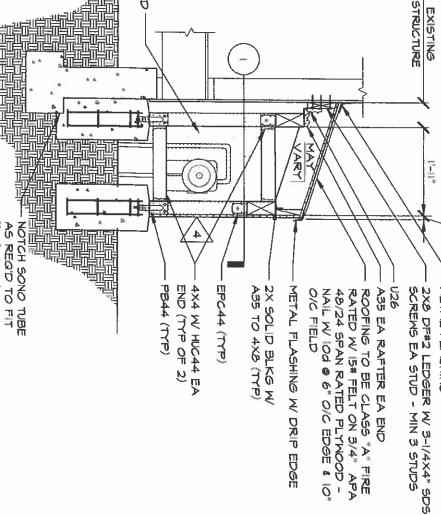


SHEATHING IN SHOWN SHADED

GARY DAVIS GROUP DESIGN AND ENGINEERING

GAS METER SHED

Pg = 545 psf

SOUTHWEST



All drawings and written material appearing herein constitute original and unpublished work of the engineer and may not be auplicated used or disclosed without written consent of the engineer.

SIDE ELEVATION

SHED ROOF

MAY 1, 2009 1/2" = 1'-0" U.N.O.

Į

643.10 Meter Shed.dwg

EXISTING STUCTURE


STEET'S

(3)

ď





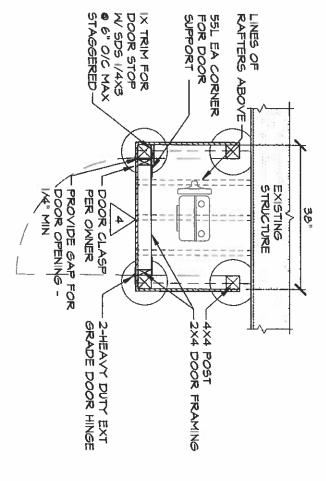

サスタススの サイタス

GAS METER SHED SOUTHWEST

Pg = 545 psf

GARY DAVIS GROUP
DESIGN AND ENGINEERING

post office box 7409 tel 530.583.9222

garydavisgroup.com



Project Number	643.IO
Dasigned By	¥×
Drafted By	65
Ciliant Name	SOUTHMEST GAS
Client Phone	
Revisions	

All drawings and written material appearing herein constitute original and unpublished work of the engineer and may not be dupilcated, used or disclosed without written consent of the engineer.

FRAMING PLAN

SHED ROOF

MAY 1, 2009 1/2" = 1'-0" UNO.

643.10 Meter Shed.dwg

SIEEE

9



NOTES

800F SNOW LOAD (p_s) : MAX. 687 PSF PER PLACER COUNTY, 7501 FT & UP, TABLE A-16-C ADDITION TO IBC SECTION 1608. ADDITIONAL FOS: I=1.5.

FRAMING LUMBER TO BE DOUGLAS FIR #2 OR BETTER ALL DIMENSIONS ARE TO BE VERIFIED BY THE CONTRACTOR PRIOR TO FABRICATION/CONSTRUCTION

PLYWOOD SHALL BE PER AMERICAN PLYWOOD ASSOCIATION SPECS

NAIL HOLES PER MANUFACTURER'S LITERATURE ALL FRAMING DEVICES ARE SIMPSON "STRONG-TIE" CONNECTIONS INSTALL DEVICES AND FILL ALL

ALL NAILS SHALL BE COMMON. FOR NAILING NOT NOTED REFER TO IBC TABLE 2304.9.1. ALL NAILS INTO PRESSURE TREATED WOOD TO BE HOT DIPPED GALVANIZED.

FOR FRAMING DETAILS NOT SHOWN REFER TO IBC "CONVENTIONAL FRAMING" PROVISIONS

MEMBERS IN CONTACT WITH CONCRETE OR MASONRY SHALL BE PRESSURE TREATED OR FOUNDATION GRADE REDWOOD. DO NOT PLACE ANY WOOD MEMBERS IN CONTACT WITH THE EARTH.


PLYWOOD SHEAR WALL PANEL VENEERS SHALL NOT BE BROKEN OR CRUSHED UPON THE INSTALLATION OF SHEAR WALL NAILING.

EXTERIOR FINISH OR SIDING OVER PANELS TO BE DETERMINED BY OWNER

UPKEEP AND MAINTENANCE OF THE ADJOINING RESIDENCE OR STRUCTURE. IT IS IMPORTANT TO KEEP GUTTERS FREE OF LEAVES AND DEBRIS, INCLUDING THOSE ABOVE OR NEAR THE NATURAL GAS METER. THE ACCUMULATION OF ICE THAT COULD RESULT IN AN ICE FALL ALSO, NO SHED WILL PROTECT AGAINST FALLING ICE SHEETS, SO CARE MUST BE TAKEN TO PREVENT A SNOW SHED WILL HELP PREVENT SNOW AND ICE ACCUMULATION, BUT IS IS NOT A SUBSTITUTE FOR THE

GAS METER SHED **SOUTHWEST** Pg = 545 psf

GARY DAVIS GROUP
DESIGN AND ENGINEERING



not be duplicated, used or disclosed without written consent of the engineer. appearing herein constitute original and unpublished work of the engineer and may All arawings and written material

Description

NOTES

SHED ROOF

MAY 1, 2009 1/2" = 1'-0" U.N.O.

\$ Flot Date Scole

643.10 Meter Shed.dwg

の出版

FRONT ELEVATION

NZ Z





GAS METER SHED

Pg = 545 psf

SOUTHWEST

GARY DAVIS GROUP
DESIGN AND ENGINEERING

4-#4 BARS VERT #3 TIES - 2 @ TOP

FACE OF EXISTING STRUCTURE BEYOND

3" CLR (TYP)

5-2XB ROOF RAFTERS EQ

2" & VENT HOLE BLOCKING SPACED.

4

4X8 DF#2 BEAM

SECTION X-X

W/ Od @ 4" O/C

15/32 CDX PLYMOOD

garydavisgroup.com

post office box 7409 tel 530.583.9222

Cilent Name Drafted By Project Number reigned By SOUTHWEST GAS g <u>ჳ</u> 643.0

Client Phone

All drawings and written material appearing herein constitute original and unpublished work of the engineer and may not be duplicated, used or disclosed without written consent of the engineer. Revisions

FRAMED W 2X4 PERIMETER # @

- SLOPE 1/2"

(TYP OF 4) 4X4 DF#2 POST

12" 0/0

DOOR TO BE

FRONT ELEVATION

SHED ROOF

645.10 Meter Shed.dwg 1/2" = 1'-0" UNO. NOTE: RECOMMENDED DEPTH FOR FROST HEAVE IS 24".

MAY 1, 2009

P

#

STEERS